


Stationary concrete pump

BSA 1409 HP D5

Output up to 92 m³/h
 Delivery pressure up to 152 bar

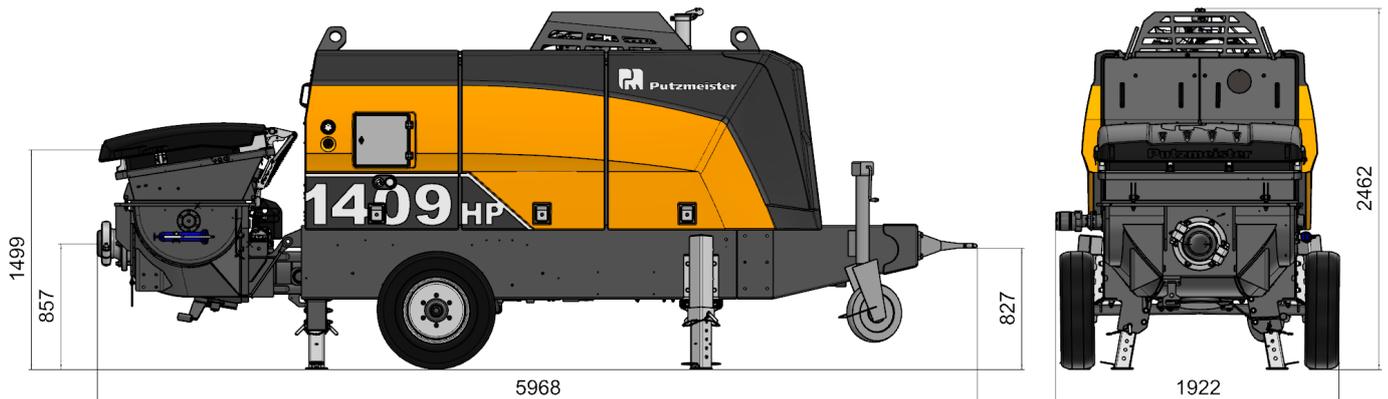

Note: Standard version. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1409 HP D5
Material number		103421.000
Output	m ³ /h	92* / 57
Delivery pressure	bar	84* / 152
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		35* / 22
Engine power	kW	180
Hopper		RS 905 HF
Capacity	l	approx. 600
Filling height	m	1.49
Transfer tube		S 2015 D
Line connection	mm	ZX 125
Pressure connection	"	8.0
Control system		Ergonic 3 FFH
Weight approx.	kg	6600

* Values for hydraulic fluid being fed to rod side.
 All data maximum theoretical

Serial equipment

Agitator safety switch off	Gate valve connection
Cable remote control 10 m	Grill 60 mm
Central lubrication on hopper with grease gun	Hard metal wear parts kit
Cleaning accessories	Longlife delivery pistons
Coloring: Pump, frame and roof anthracite-grey Doors chrome yellow	Operating manuals and spare part list
Concrete hopper with agitator	Outriggers 4× mech.
Concrete output adjust	Pump flow meter
Concrete pressure adjust	Speed drawdown automatically on pump stop
Drawbar eye (DIN)	Splash guard foldable
Drive diesel, Deutz 180 kW, Stage V	Support wheel
Electronic error management	Tool set incl. standard equipment
Ergonic Graphic Display (EGD)	Trailer F8, can be driven on site
Flushing water pump 50 l/min 20 bar	

See quotation for exact serial delivery scope.
 Comprehensive range of options available on request.