


Stationary concrete pump

BSA 1413 D5

Output up to 130 m³/h
Delivery pressure up to 82 bar

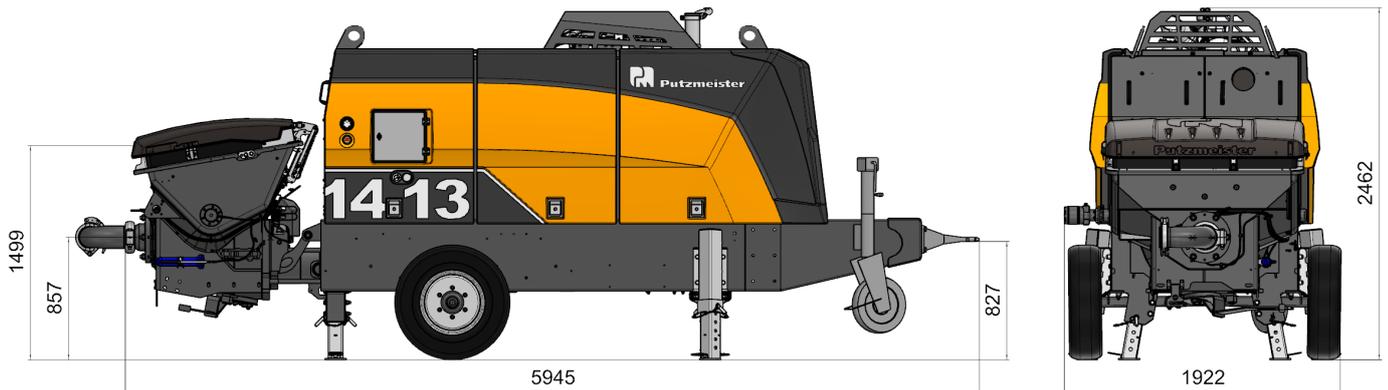

Note: Standard version. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1413 D5
Material number		103423.000
Output	m ³ /h	130 / 87*
Delivery pressure	bar	55 / 82*
Delivery cylinder	Ø mm	230
Delivery cyl. stroke	mm	1400
Strokes / minute		37 / 25*
Engine power	kW	180
Hopper		RS 909
Capacity	l	approx. 600
Filling height	m	1.49
Transfer tube		S 2015 D
Line connection	mm	SK 125
Pressure connection	"	5.5
Control system		Ergonic 3 FFH
Weight approx.	kg	5500

Serial equipment

Agitator safety switch off	Flushing water pump
Cable remote control 10 m	50 l/min 20 bar
Central lubrication on hopper with grease gun	Gate valve connection
Cleaning accessories	Grill 60 mm
Coloring: Pump, frame and roof anthracite-grey; cover chrome yellow	Operating manuals and spare part list
Concrete hopper with agitator	Outriggers 4× mech.
Concrete output adjust	Pump flow meter
Concrete pressure adjust	Reduction elbow 90°; SK 150 → SK 125
Drawbar eye (DIN)	Speed drawdown automatically on pump stop
Drive diesel, Deutz 180 kW, Stage V	Splash guard foldable
Electronic error management	Support wheel
Ergonic Graphic Display (EGD)	Tool set incl. standard equipment
	Trailer F8, can be driven on site

* Values for hydraulic fluid being fed to piston-side
All data maximum theoretical

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.